

TIER 1 Bloomberg NEF rated since 2012
 6.6% World market share since 2005
 5% Australian market share since 2008

We Make Solar Evolve

EiTe POLY

Anti-glare Series

- ET-P660265WW 265W
- ET-P660260WW 260W
- ET-P660255WW 255W
- ET-P660250WW 250W



Self cleaning glass coating.
 Cleaned by rainwater or hose adding
 up to 5% more power per day



Zero outsourcing to other
 factories. Total quality control
 assured.



High safety standards
 2400pa cyclone wind speed rated, Anti
 PID, Salt-Mist and Ammonia resistant.




Superior performance in heat
 and low light
 More power delivered to your inverter
 every day.

0 to
 +5W

0 to +5W positive tolerance
 You get up to 5W more than
 rated power, and never less.

48

48-hour Australia - wide response
 service.

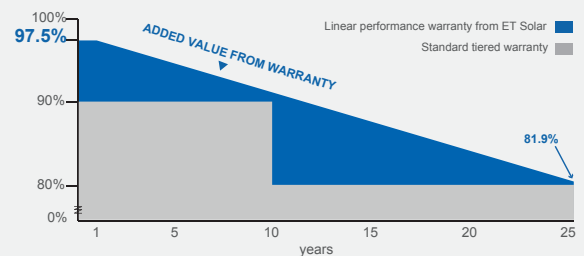

25 25-year performance warranty to 81.9%

10 NOW 12-year defect warranty

IEC 61215 Ed.2
 IEC 61730
 IEC 61701
 IEC 62716



Towards Excellence

M/ET-PD-EN-EU2016V2

www.etsolar.com

ELECTRICAL SPECIFICATIONS

Model Type	ET-P660265WW	ET-P660260WW	ET-P660255WW	ET-P660250WW
Peak Power (Pmax)	265W	260W	255W	250W
Module Efficiency	16.29%	15.98%	15.67%	15.37%
Maximum Power Voltage (Vmp)	30.74V	30.59V	30.29V	30.12V
Maximum Power Current (Imp)	8.62A	8.50A	8.42A	8.30A
Open Circuit Voltage (Voc)	38.29V	38.16V	37.89V	37.58V
Short Circuit Current (Isc)	9.24A	9.07A	9.00A	8.88A
Power Tolerance	0 to +5W			
Operating Temperature	- 40 ~ + 85 °C			
Maximum System Voltage	DC 1000V			
Nominal Operating Cell Temperature	45.3±2 °C			
Fire Safety	Class C			
Maximum Series Fuse Rating	20A			

MECHANICAL SPECIFICATIONS


Cell type	156 mm x 156 mm
Number of cells	60 cells in series
Weight	18.5 kg (40.79 lbs)
Dimensions	1640×992×35 mm (64.57×39.06×1.38 inch)
Max Load	5400Pascals (112 lb/ft ²)

TEMPERATURE COEFFICIENT

Temp. Coeff. of Isc (TK Isc)	0.04 %/°C
Temp. Coeff. of Voc (TK Voc)	-0.34 %/°C
Temp. Coeff. of Pmax (TK Pmax)	-0.41 %/°C


OPTICAL CHARACTERISTICS

Poly AG module VS. Poly normal module

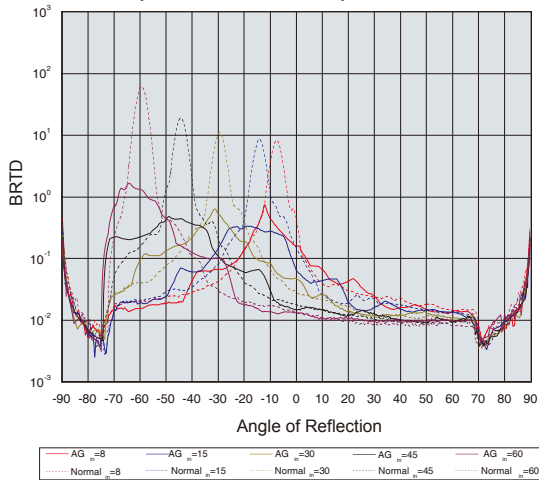


PHYSICAL CHARACTERISTICS

Unit:mm (inch)

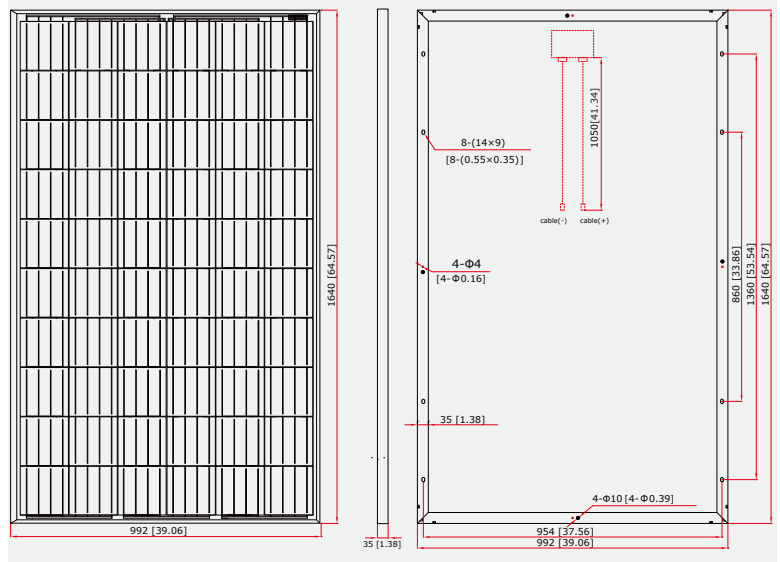


ELECTRICAL CHARACTERISTICS

Temperature Dependence of Isc, Voc and Pmax

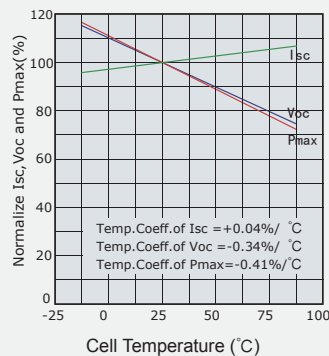

Irradiance Dependence of Isc, Voc and Pmax (AM1.5, Cell Temperature 25°C)

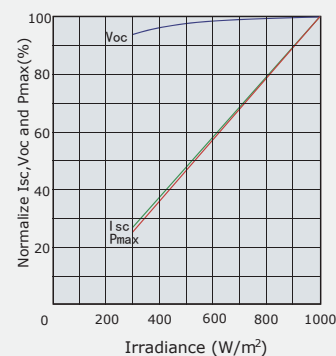

Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m² solar irradiance, 1.5 Air Mass, and cell temperature of 25°C.

The NOCT is obtained under the Test Conditions: 800 W/m², 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum.

Please contact support@etsolar.com for technical support. The actual transactions will be subject to the contracts. This parameters is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.